

Volkert, Inc.
215 Fairpoint Drive
Suite B
Gulf Breeze, Florida 32561
www.volkert.com



July 19, 2024

**Whiting Aviation Park
Fire Flow Expansion-Phase A
(Volkert Project No. 1202201)**

TO: ALL PLAN HOLDERS

SUBJECT: ADDENDUM NO. 4

The following revisions are hereby added as **Addendum No. 4** to the referenced project plans and specifications and shall be considered when preparing proposals for the construction of this project:

PART 1 – CHANGES TO PLANS

1. **REPLACE** Sheet G-02 with Revised Sheet G-02 attached to this Addendum. Revisions include:
 - a. Revised Summary Of Quantities, Item No. 7, New Fencing quantity from 180 LF to **125 LF.**
2. **REPLACE** Sheet C-02 with Revised Sheet C-02 attached to this Addendum. Revisions include:
 - a. Revised quantity of fence removal from +/- 70 feet to **+/- 45 feet.**
 - b. Revised quantity of new fence to be installed from +/- 180 LF to **+/- 125 LF.**
 - c. Relocated new fence installation location.
 - d. Revised dimensions of Class 2 Rip Rap from +/- 10 ft. X 25 ft. X 1 ft. to **+/- 12 ft. X 15 ft. X 1 ft.**
 - e. Added 10" pine and 15" oak trees to be removed. The cost of removal for these trees shall be included in the cost of site demolition work.
 - f. Added dimensioning between existing fire service booster station and the new fire service booster station.
 - g. Added Northing and Easting Coordinates for True North corner of new fire service booster station concrete sidewalk pad.

PART 2 – CHANGES TO SPECIFICATIONS

1. **REVISE** Schedule of Values, Line Item 7, New Fencing quantity to read **125 LF.**


PART 3 – QUESTIONS AND ANSWERS

Q1: Not Applicable

A1: Not Applicable

Receipt of this Addendum No. 4 shall be acknowledged in the appropriate location of the Contract Documents.

Sincerely,

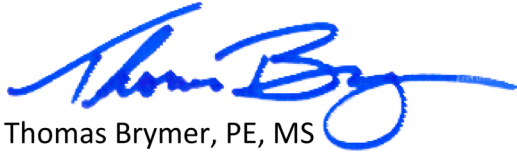

Thomas Brymer, PE, MS
Project Manager

Attachments